



KENWORTH
THE WORLD'S BEST



NEWAY
SAF-HOLLAND Group

ADZ SERIES TRUCK SUSPENSION


SAFHolland
Engineering Your Road to Success

NEWAY ADZ SERIES TRUCK SUSPENSION – TOUGH MEET TOUGHER

With 54% more durability and 27% more roll stability, the ADZ Series Truck Suspension not only outperforms the AD Series, it's **257 lbs.* lighter per axle**.

Note: Equipment and specifications shown in this brochure are subject to change without notice.

Consult with your Kenworth dealer at time of ordering for standard and optional equipment.

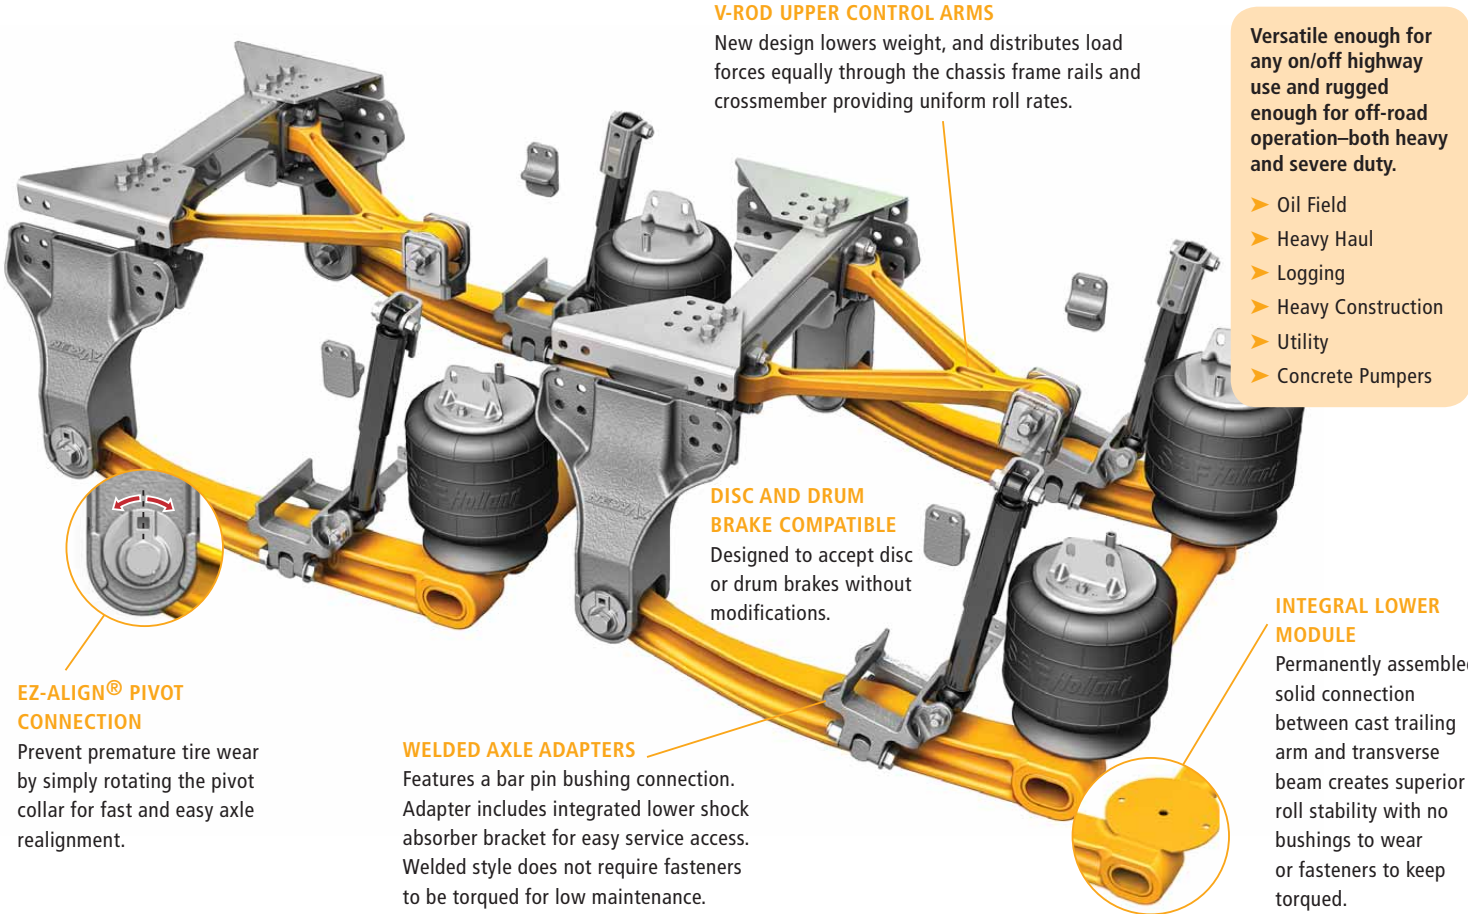

V-ROD UPPER CONTROL ARMS
New design lowers weight, and distributes load forces equally through the chassis frame rails and crossmember providing uniform roll rates.

Versatile enough for any on/off highway use and rugged enough for off-road operation—both heavy and severe duty.

- Oil Field
- Heavy Haul
- Logging
- Heavy Construction
- Utility
- Concrete Pumps

DISC AND DRUM BRAKE COMPATIBLE
Designed to accept disc or drum brakes without modifications.

INTEGRAL LOWER MODULE
Permanently assembled solid connection between cast trailing arm and transverse beam creates superior roll stability with no bushings to wear or fasteners to keep torqued.

WELDED AXLE ADAPTERS
Features a bar pin bushing connection. Adapter includes integrated lower shock absorber bracket for easy service access. Welded style does not require fasteners to be torqued for low maintenance.

EZ-ALIGN® PIVOT CONNECTION
Prevent premature tire wear by simply rotating the pivot collar for fast and easy axle realignment.



SINGLE AXLE
23,000 / 26,000 LBS.
(10,433 / 11,793 kg)



TANDEM AXLE
46,000 / 52,000 LBS.
(20,865 / 23,587 kg)



TRIDEM AXLE
69,000 / 78,000 LBS.
(31,298 / 35,380 kg)



KENWORTH TRUCK COMPANY
P.O. Box 1000
Kirkland, Washington 98083-1000
(425) 828-5000

CANADIAN KENWORTH COMPANY
6711 Mississauga Road N.
Mississauga, Ontario L5N4J8
(905) 858-7000

SPECIFICATIONS

	ADZ-123	ADZ-126	ADZ-246	ADZ-252	ADZ-369	ADZ-378
Capacity (Lbs.)	23,000	26,000	46,000	52,000	69,000	78,000
Weight (Lbs.)*	588	626	1177	1253	1764	1878
Axle Configuration	Single	Single	Tandem	Tandem	Tridem	Tridem
Ground Clearance	11"	11"	11"	11"	11"	11"
Creep Rating (Lbs.)	30,250	33,000	60,500	66,000	90,750	99,000

*Weight includes all components as shown in above picture for a 10" ride height, other configurations may change weight.

