



SAF-HOLLAND Group

## HOLLAND TG SERIES

SINGLE & DUAL  
CYLINDER  
FOLD-AWAY™  
LIFTGATES FOR  
TRUCK & TRAILER  
APPLICATIONS



2500, 3000 & 3500 LB. CAPACITY MODELS





# TG SERIES CONVENTIONAL FOLD-AWAY™

DUAL CYLINDER MODEL  
2,500 / 3,000 / 3,500 LB.  
CAPACITIES

SINGLE CYLINDER MODEL  
2,500 LB. CAPACITY

## POWER UP/POWER DOWN

## TRUCK & TRAILER APPLICATIONS

- Standard 88" platform width for 102" and 96" wide vehicle applications.
- Can be installed without deck extension for flush mount.
- Electronics include a cab, body, or pump box 150 amp circuit breaker and master disconnect switch.
- Factory plumbed hydraulics are available.

## OPTIONAL AUXILIARY DUAL PUMP/MOTOR SYSTEM


- In normal dual pump mode, one pump/motor provides power while the second provides power-down to "exercise" both power units keeping both units lubricated and functional. In the event of power failure, the system can be switched from dual pump mode to select either of the single pumps to completely power the liftgate.

**DUAL LOCK LATCHES** ensure safe platform stowage during vehicle transit.

**WIDE SPACED LIFT ARMS** with dual acting cylinders help stabilize off-set loads.

**ALL PIVOT CONNECTIONS** feature grease zerks.

**PLATFORM** is easily adjusted for pitch.

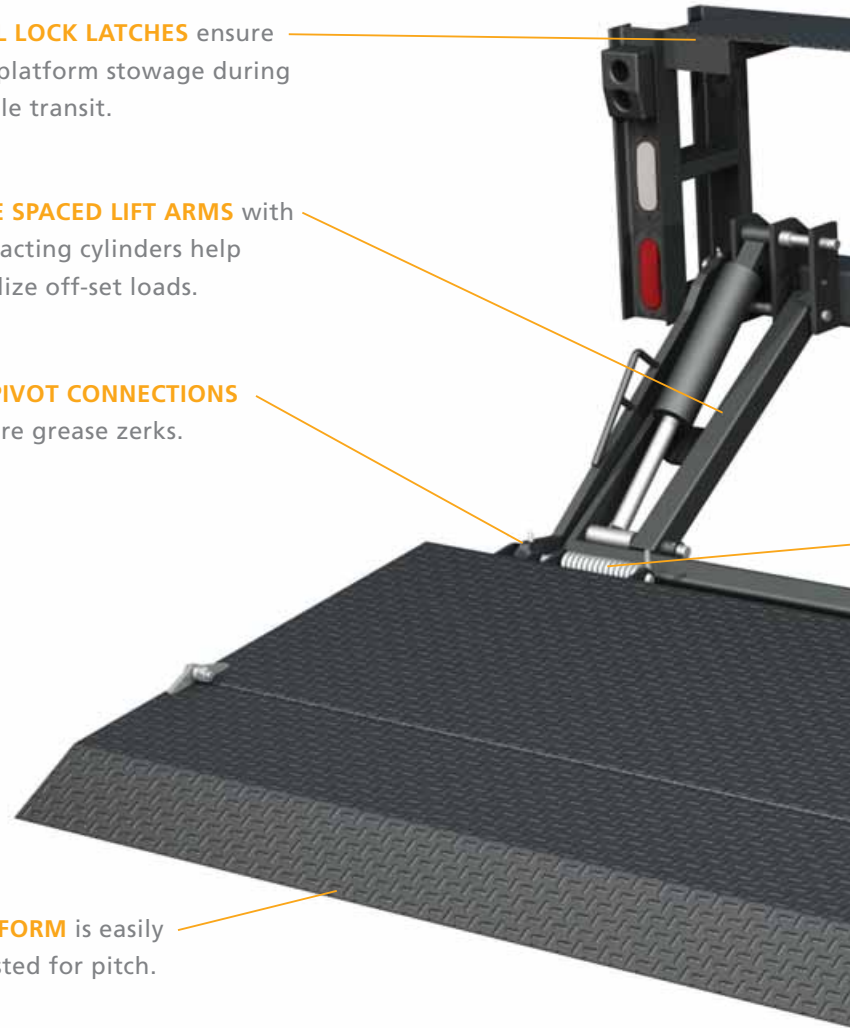

### 2,500 LB. CAPACITY SINGLE CYLINDER MODEL

When the application only calls for a 2,500 lb. capacity liftgate, the single cylinder model provides the same features and options as the higher capacity dual cylinder model.



### Power Pack / Battery Boxes for TG Series Liftgates

Main Tube Mount Box Standard	Side Mount Box Options			Side Mount Box Brackets
Black Armour Coated	Power Pack Box Only	Power Pack Box & Battery (2) Box	Combination Power Pack/ Battery (2) Box	Black Armour (Hot Dipped Galvanized Optional)
	Steel Boxes and Covers			
<ul style="list-style-type: none"> <li>• Weather Seal Closures</li> <li>• Bulkhead Fittings for Hydraulics</li> <li>• Strain-relief Grommets for Electrical</li> </ul>				





**DUAL TORSION SPRINGS**  
provide easy platform folding.

**THREE TAIL LIGHT OPTIONS**

1. Weld-on or bolt-on post mounted light boxes.\*
2. 5" steps with completely integrated recessed tail lights with light guards.\*
3. 5" steps prepped for ready-to-install tail lights with light guards.

\* Tail lights are available as LED or Incandescent and can be configured for trailer or truck applications.

**CORROSION PROTECTION**

- Black Armour™ protection is standard.
- Hot dip galvanized coating is available.
- Sealed marine grade toggle switches.
- Lift cylinder rods are chromed for enhanced corrosion and wear resistance.
- Steel platform crossmembers are internally coated and sealed to protect from the inside out.



**SAF-HOLLAND LIFTGATE WARRANTY**

- **STANDARD 3-YEAR PARTS AND LABOR FOR COMPLETE GATE**
- **AVAILABLE 5-YEAR EXTENDED WARRANTY ON PARTS AND LABOR FOR COMPLETE GATE**

See warranty specifications for complete details.

**Dual Cylinder Models**

Platform Specifications				Standard 92" Deck Extensions		Side Steps			Step Brace	Dock Bumpers	
Model	Capacity	Dimension / Style.	Material	Deck Heights	Depth	Ext. Plate Thickness	2"	3"			5"
TG3047	3,000 lbs.	40" x 88" + 7" Ramp	Steel (Optional Steel/Alum)	44" to 57"	12"	5/16"	Standard for 96" Wide Standard with Black Armour Protection or Optional Hot Dip Galvanized.	Standard for 102" Wide	Optional for 102" Wide	Optional Uncoated	Optional Heavy-Duty Rubber 'D' Style
TG3048	3,000 lbs.	47" x 88" Wedge Style	Extruded Aluminum	44" to 54"	12"	5/16"					
TG3547	3,500 lbs.	40" x 88" + 7" Ramp	Steel	44" to 54"	12"	1/2"					
TG3548	3,500 lbs.	40" x 88" Wedge Style	Extruded Aluminum	44" to 54"	12"	1/2"					
TG3552	3,500 lbs.	52" x 88" Wedge Style	Extruded Aluminum	46" to 57"	12"	1/2"					
TG3561	3,500 lbs.	61" x 88" Wedge Style	Extruded Aluminum	48" to 57"	12"	1/2"					

NOTE: Additional dual cylinder models are available with varying platform materials and sizes.

NOTE: Black Armour coated steps shipped separate from deck extension. Galvanized steps welded to deck extension prior to galvanization.

**Single Cylinder Models**

Platform Specifications				Standard 92" Deck Extensions		Side Steps			Step Brace	Dock Bumpers		
Model	Capacity	Dimension / Style.	Material	Deck Heights	Depth	Ext. Plate Thickness	2"	3"			5"	
TG2536	2,500 lbs.	31" x 88" + 5" Ramp	Steel	34" to 57"	12"	5/16"	Black Armour Protection is Standard, or Optional Hot Dip Galvanized.	Optional for 96" Wide	Optional for 102" Wide	Optional for 102" Wide	Optional Uncoated	Optional Heavy-Duty Rubber 'D' Style
TG2542	2,500 lbs.	42" x 88" Wedge	Steel	44" to 57"	12"	5/16"						
TG2545	2,500 lbs.	37" x 88" + 5" Ramp	Fabricated Aluminum	44" to 57"	12"	5/16"						
TG2547	2,500 lbs.	40" x 88" + 7" Ramp	Steel (Optional Steel/Alum)	44" to 57"	12"	5/16"						

NOTE: Black Armour coated steps shipped separate from deck extensions. Galvanized steps welded to deck extension prior to galvanization.



From fifth wheel rebuild kits to suspension bushing repair kits, SAF-HOLLAND Original Parts are the same quality components used in the original component assembly. SAF-HOLLAND Original Parts are tested and designed to provide maximum performance and durability. Will-fits, look-alikes or, worse yet, counterfeit parts will only limit the performance potential and could possibly void SAF-HOLLAND's warranty.

Always be sure to spec SAF-HOLLAND Original Parts when servicing your SAF-HOLLAND product.

XL-TG101435L-en-US Rev A - 2010-08-16 - Amendments and errors reserved - © SAF-HOLLAND, Inc.

## HIGH QUALITY COMPONENTS FOR THE COMMERCIAL VEHICLE INDUSTRY



EUROPE · NORTH AMERICA · SOUTH AMERICA · AFRICA · ASIA · AUSTRALIA

SAF-HOLLAND USA, Inc.  
888.396.6501 Fax 800.356.3929

SAF-HOLLAND Canada Limited  
519.537.3494 Fax 800.565.7753  
Western Canada 604.574.7491 Fax 604.574.0244

[www.safholland.com](http://www.safholland.com)

