


## Alcoa wheels made of aluminum released for SAF axles with disc brakes

It is necessary to use the Alcoa wheel 22.5 x 15.00 for mounting the so-called super single tires (e.g. 455/40 R22.5 or 455/45 R22.5).

**Alcoa aluminum wheels 22.5 x 15.00 with a wheel offset of 120 mm (ET 120) are released for various SAF axles with a disc brake and an axle load of 9000 kg.**

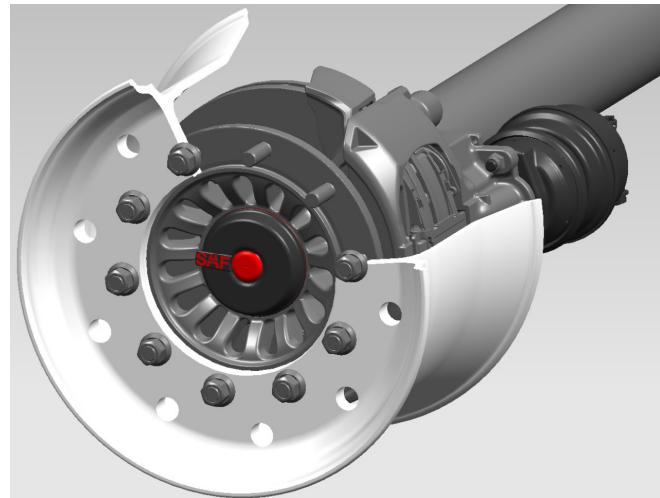

Axe versions released for mounting Alcoa aluminum wheels 22.5 x 15.00 – 850520/850521 – ET120		
Axle version	Brake version	Brake type
SKRB 9022KI01/ BI9-22K01 SKRB 9022K01 / B9-22K01	Knorr SB7 (SK)	SBK2243 -11S
SKRB 9022WI / BI9-22W SKRB 9022W / B9-22W	WABCO PAN 22-1	SBW2243 -11S
SKRB 9019KI / BI9-19K SKRB 9019K / B9-19K	Knorr SB6 (SN)	SBK1937 -11S
SKRB 9019WI / BI9-19W SKRB 9019W / B9-19W	WABCO PAN 19-1+	SBW1937 -11S

### Note!

Make sure that the brake caliper is able to move freely and that there is enough clearance between the tires and the adjacent components (min. 25 mm).