


New axle versions for the use in low loaders

At the request of many customers and in order to complete the product portfolio, SAF-HOLLAND has developed further axle versions. The new axle versions are primarily addressed to manufacturers, who produce trailers for special applications, such as low loaders.


New axle versions with drum brake

Axle version	Axle base type ID 1	Brake ID 2	Test load ID 3	Test report ID 4	Axle load [to]	Exciter ring teeth No.
ZZL11-3020	SNK3020	SNK 300x200	11379	TDB0487	11	80
ZZL11-3720	SNK3720	SNK 367x200	12753	TDB0460	11	80

The new forced-steering axle versions complement, together with the already existing rigid and self-steering axles, the product portfolio in the 11to range.

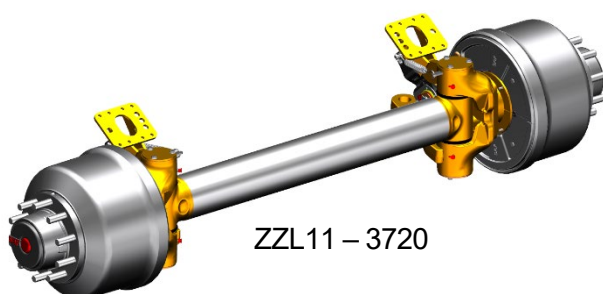

ZZL11 – 3720

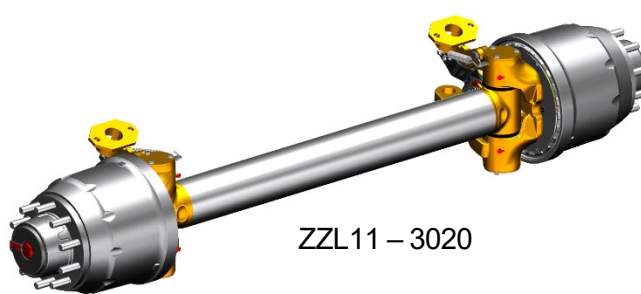

ZZL11 – 3020

The new axle versions are covered and described with the test reports provided by SAF-HOLLAND in accordance with Appendix 11 of the UN (ECE) R 13. The corresponding test reports are known from the previous product portfolio.

When creating the approval documentation, we recommend referring to the “Axle base type” (ID 1) to describe the axle.

The test reports are stored on the SAF-HOLLAND website in the area sales / test reports (<http://www.safholland.org/testreports/>).

The new axle versions are available from order intake CW 05/2021.

With the introduction of the additional axle versions, axles with drum brake for 17.5" and 19.5" dual tires are now available in the gradations 9to, 10to, 11to and 12to.