



ATLAS[™] 55

CAPACITY

· Static Ultimate Load: 77,000 kg

· Side: 13,600 kg

· Lift: 24,950 kg **WARRANTY:**

· 12 Months Workmanship and Materials Warranty

GEAR RATIOS V'S TURNS PER INCH:


- · Low Gear = 38.7
- High Gear = 4.5

THE NEW BENCHMARK FOR LIFTING PERFORMANCE.

The Holland Atlas tm 55 Landing Gear merges proven engineering technology with quality and durability to create a new standard in landing gear performance. From the smooth shifting and reliability of the patented Constant Mesh gearbox design, to the durability and toughness of the exclusive FloatingNuttm with Twin-Bulkhead construction; the Atlas tm 55 offers a landing gear that was built to carry on the Holland name and tradition of trouble-free performance and exceptional value for years to come.

RUGGED, DURABILITY, **EASY OPERATION**

- Constant Mesh Gearbox Design Provides Trouble-Free Shifting
- Exceeds All AAR M-931 and All TTMA RP-4 Performance Specifications
- High-Strength Ductile Iron Gears
- Reduced Weight with Increased Structural Integrity
- Black Armour

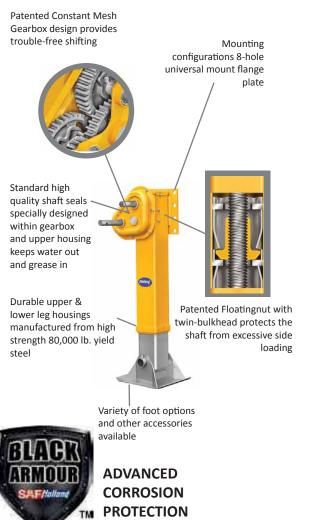

SPECIFICATIONS

MODEL	TRAVEL		SPEC		DESCRIPTION
		А	В	kg	
LG4019S	19"/493	1347	854	81	Atlas 55- Skid Foot
LG4019C	19"/493	1372	879	98	Atlas 55- Compensating Foot

Weights are approximate and do not include cross shaft, winding handle and fixings (add 6 kg)



106.4 Ø13.5 50.8) (114)

--190.5 -

SAF-HOLLAND (Aust.) Pty. Ltd. · PO Box 63 · 115 High St · Melton Vic 3337

Tel: (03) 9971 7900 Fax: (03) 9743 6763

Western Australia · Tel: (08) 9353 1720 Fax: (08) 9353 6144 Queensland · Tel: (07) 3375 7033 Fax: (07) 3375 7044 Tel: (02) 9672 1950 New South Wales · Fax: (02) 9672 1994 South Australia · Tel: (08) 8345 1546 Fax: (08) 8345 0985

